

Instruction Sheet

Instructions for Setup of the AMK-CB Air Actuated Switch with Time Out Function for “On-Call” Hot Water


INSTALLATION & OPERATION INSTRUCTIONS

The AMK-CB is an easily installed air actuated ON/OFF control with time out function for any AquamotionHot Three Circulator.

- Eliminates the need for an electrical wall switch.
- Simplifies installations
- Operates on 115V household wall receptacle
- 3 prong grounded plug for protection against electric shock.

The air switch is supplied with the following parts (See Fig. 1)

- | | |
|-----------------------|----------------------|
| 1. Air Button | 4. Switch Box |
| 2. Push Button | 5. Air-Tubing |
| 3. 3 Prong Receptacle | 6. 3 Prong Line Cord |

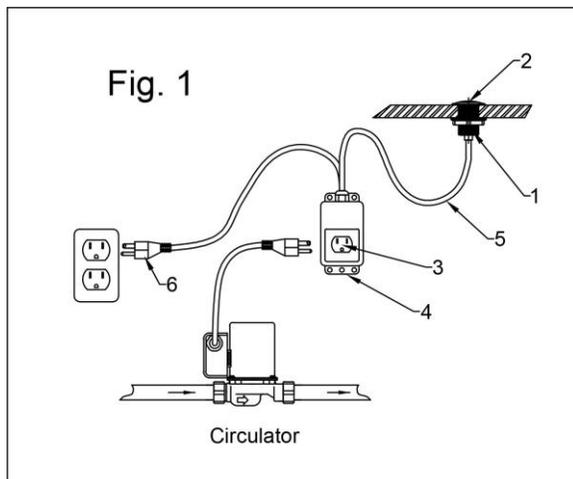

If there is no appropriate hole for mounting the Button Body, drill a 1-3/8" (35mm) diameter hole into your counter or sink in a location accessible to the user.

Installation (see Fig.1)

Remove the gasket and nut from the Button Body (1). Place the Button Body (1) through the hole in the counter or sink.

Install the gasket and nut into the Button Body and hand tighten.

Push the Air-Tubing (5) into the connector at the bottom of the Button Body (1).

Push the other end of the Air-Tubing (5) into the inlet connector of the switch box (4).

Plug the circulator line cord into the Switch Box receptacle (3).

Plug the Line Cord (6) from the switch box into a convenient wall receptacle.

OPERATION:

Press the Air Switch Actuator one time until you hear a “click,” the circulator will turn on.

Power is supplied to the circulator for approximately 5 minutes after the Air Switch Actuator is pressed. The circulator may cycle on and off during the 5 minute period.

CAUTION: Circulator may start when the line cord is plugged in. Unplug the line cord and wait 5 minutes before plugging it in again.